



Figure 1B

Figure IC

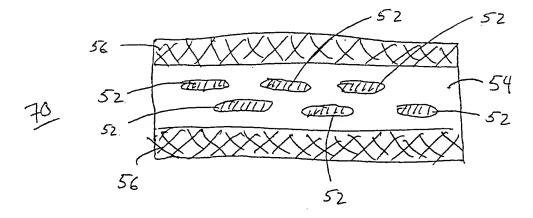

1000 n(77K)=1.40 ♦ 66K, 26.5A <sup>a</sup> 71K, 21.6A ×85K, 11.6A A 77K, 15.9A n(66K)=1.53 o 90K, 8.6A + 95K, 6.1A 129-P L11 (Ga doped 316L SS laminated mono), sample thermally stabilized with n(95K)=1.19 Cu & thermal grease, plot shows E(I) for composite 100 1940574E CIECO Current (A) flgure 2 10 1.E-06 1.E-05 1.E+03 1.E+02 1.E-04 1.E+01

REST AVAILABLE COPY

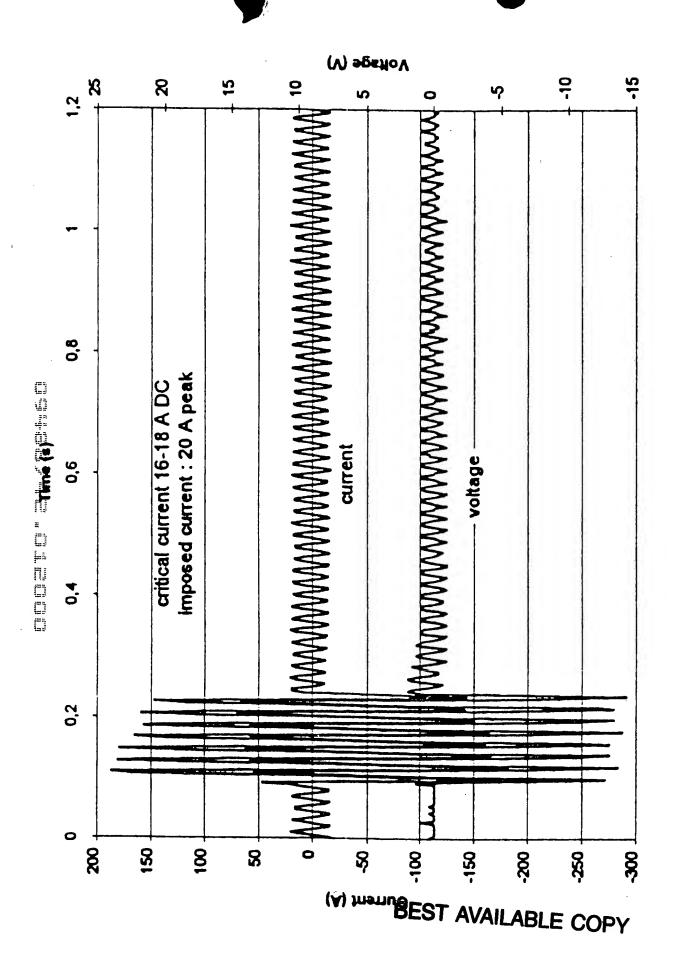

4 1

Figure 3